



# CHARIOT



**RATED  
CAPACITY**

**UP TO  
400 LBS**

**12 VOLT  
ELECTRIC  
POWER  
SYSTEM**

**MAX SPEED  
FORWARD  
UP TO**

**9  
MPH**

Shown With Options

Columbia's Chariot is designed to move key personnel around your facility quickly, quietly and efficiently. With PURE ELECTRIC power and an overall width that will fit through most standard doorways, your Chariot will take you everywhere you need to go!

The Chariot moves 3X faster than normal walking speed, allowing you to cover more ground in less time!

Plus, with low center of gravity and increased visibility of stand-up operation, the Chariot is the safest way to move around an indoor or outdoor space.



- 1** Strobe Light
- 2** Custom Branding
- 3** Side Bumpers




**COLUMBIA**

# BUILT FOR WORK



## Dimensions

Step Height:	5.25 in.
Load Bed Height:	24 in.
Ground Clearance:	2.5 in.

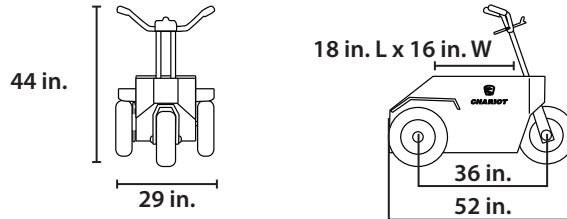

## Performance

### 12 Volt

Max Speed Forward:	9 MPH
Turning Radius:	Curb to curb - 79 in.   Intersecting aisle - 41 in.
Range <sup>1</sup> :	Up to 35 miles

## Weight & Capacity

Vehicle Weight :	366 lbs.
Rated Capacity <sup>2</sup> :	400 lbs.
Towing Capacity:	N/A

## Power Train

Motor:	12-Volt DC, series wound, solid copper windings, class H insulation
Horsepower:	0.7 HP @ 750 rpm
Batteries:	Two, 6-volt, 232 amp hour, 122 minute, deep cycle
Charger:	Built-in, micro-processor controlled, fully sealed, 120 VAC
Controller Type:	3 speed, slide-bar switch
Controller Rating:	N/A
Motor Braking Mode:	N/A
Directional Control:	Optional reverse
Drive Unit/Differential:	Heavy-duty chain to drive wheel, 7.4:1 final drive ratio

## Body

Passenger Capacity:	One
Seating:	Stand up operation
Body:	14-gauge powder coated structural steel smooth plate body
Lighting:	Optional head, tail & brake light
Accessories:	Shin guard; handlebar steering; composite deck board with high-density polyethylene overlay, special strobe light

## Chassis

Frame:	Heavy duty welded steel chassis
Steering:	Handle bar to front fork
Brakes:	4.5" Mechanical drum on drive wheel, automatically engaged upon dismount
Suspension:	N/A
Tires:	4.80" x 8", pneumatic, 6-ply rated, load range C

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.

<sup>1</sup> Range will vary depending on temperature, grade, payload and driving style. | <sup>2</sup> Rated Capacity Includes personnel, cargo, options and accessories.

All specifications are subject to change without notice.

*Columbia Vehicle Group, Inc.*

A Nordic Group Company | Business Ventures Since 1947

1115 Commercial Ave. Reedsburg, WI 53959  
columbiavehicles.com



**COLUMBIA**



**TOMBERLIN**





Call your  
local  
Hupp  
ToyotaLift  
branch  
for a  
quote today!



CEDAR RAPIDS  
319.362.0098 • 1.844.552.7216

DAVENPORT  
563.322.3168 • 1.888.322.3168

ANKENY  
515.965.5555 • 1.800.966.4877



WATERLOO  
319.433.0029

PEORIA, IL  
309.674.4877 • 1.877.751.4877

