

ATTIX 33 & 44

# Superior dust extraction

- For professional and safe cleaning



Best-in-class productivity - dust pick-up and extraction.



The ATTIX 33 & 44 dust extractors are robust and easy to handle – also when it comes to transportation from one site to another. All models offer flexible storage solutions for tools and accessories, so everything you need is at hand:

- Easy fixation of tube, hose and power cord with flexible rubber straps.
- Combined hose and cable hook for easy and quick storage and transportation
- Mount a toolbox on top of the machine using the optional adapter plate.
- The plate is designed to fit all well-known toolboxes on the market, e.g. Sortimo L-BOXX and TANOS Systainer system.
- Quick to get ready for transportation and into the back of a car.

# Powerful and safe benefits

The ATTIX 33 & 44 range is professional easy-to-handle dust extractors taking productivity, health and safety to a new level – a really value for money solution!

ATTIX 33 & 44 come with more suction power, a sealed dust system, automatic filter cleaning, and several other user benefits designed to meet the tough requirements in building & constructions and other industries.

Choosing between best-in-class filtration options, you can take on the most demanding working tasks even in hazardous dust environments.

This powerful and reliable machine is simple to use, with safe and ergonomic dust disposal when the work is done.

ATTIX 33 & 44 is easy to transport from one site to another. Flexible storage solutions for tools and accessories - such as rubber straps and adapter plates fitting all well-known tool boxes - will increase your productivity with everything at hand.

#### Automatic link-up with your power tools

- Connect your power tool to the AutoOnOff socket.
- The dust extractor automatically starts when the power tool is used.
- Ideal for electric drilling, sanding or cutting tools.
- Reduces the overall sound level.

#### Powerful and safe benefits

- Improved cleaning performance.
- Increased air velocity in both hose, nozzle and tool connector.
- InfiniClean™ - automatic filter cleaning system
- Durable & washable PTFE filter using new generation of non-stick membranes. Reliable filtration efficiency of fine dust particles - minimum 99.9%.
- No dust emission from exhaust air or power tool during filter cleaning cycle.
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag.
- Easy service and low maintenance cost: Same filter used for wet and dry pick-up.



Robust and easy to handle. Convenient transport and flexible storage solution.



Optional storage box for accessories, extra filter and/or dust bags.




Combined hose and cable hook for easy and quick storage and flexible strap for fixation of power cord, hose and accessories and tools.

# Continuously high productivity

With the ATTIX 33 & 44, Nilfisk have significantly improved productivity and performance for dust extraction :

- Nilfisk InfiniClean™ system automatically cleans the filter during operation using reversed air-flow pulse and keeping up a constant high performance
- Improved airflow and suction power with more than 15%
- higher air velocity in hose and nozzle
- Reduces downtime significantly, as container can be filled up without filter maintenance - even in demanding fine dust applications

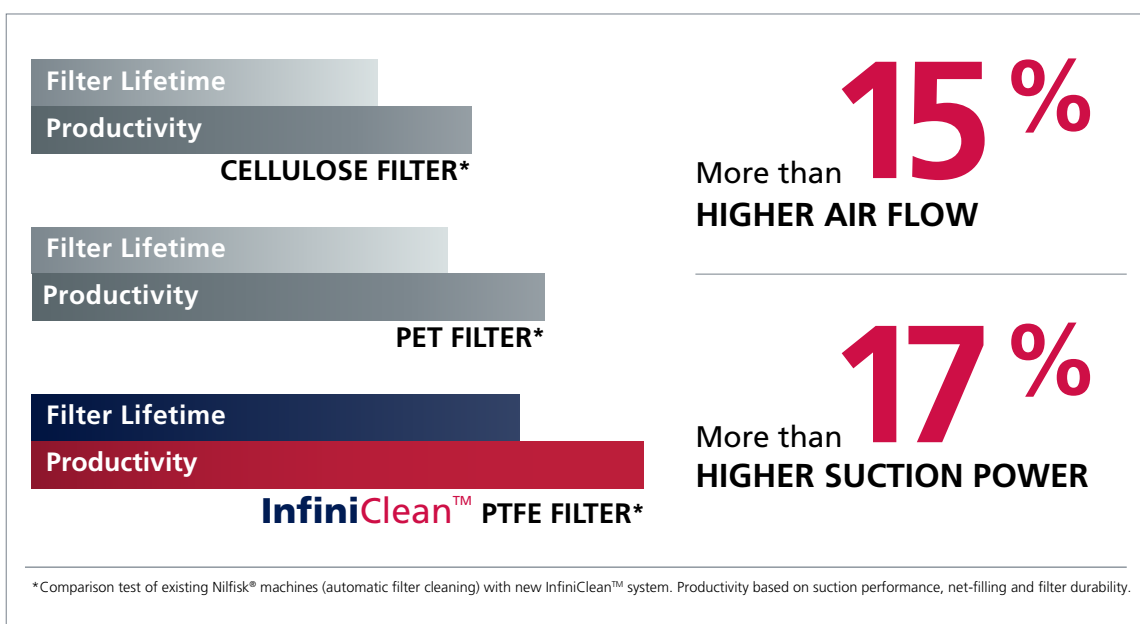

## Safety solutions for every need

ATTIX 33 & 44 are designed for demanding dust pick-up applications and always with the user in mind.



### Dust class L and M safety vacuums

Hazardous dust classes L and M for applications like industry sectors as chemicals, wood, plastics, metal, pharmaceuticals, paper and textiles. For craftsmen in building and construction, including carpenters, joiners and painters.



### Dust class H safety vacuums

Hazardous dust class H for all health-endangering dusts with OEL-values, all carcinogenic dusts and dust contaminated with germs and bacteria. Vacuum cleaners conforming to dust class H is also allowed to pick up Asbestos. For applications like industry and trade sectors as chemicals, plastics, pharmaceuticals, mining, paper and textiles. For craftsmen such as roofers and painters.



# Multiple filtration options

- a solution for every task



Motor Cooling Air filter (PET)  
Min. 99.9% filtration

Extra protection of motor unit and other electronic parts.

Upstream Main filter (PTFE)  
Min.99,9% filtration

A durable and washable, long-life filter with non-stick membrane.

Hatchback with big opening for easy access to filter with unique angled position ensure convenient service from clean side.

Easy to keep sealing area clean and prevent dust going into motor and air channels.

Upstream HEPA cartridge filter:  
>99.995% filtration

Unique dual filter solution for H-class/HEPA - 3-stage filtration and extended life-time of filter

Multiple options of dust bags:

- Fleece filter bag
- Disposal bag
- Safety bag
- Long-Life filter bag

The dual filter solution secures high filtration level and minimizes dust exposure on HEPA filter. The main filter captures most part of the dust and as 2<sup>nd</sup> step the remaining small and hazardous dust particles are captured by the HEPA filter.

- Higher safety
- Maximum filtration level
- No need for pre-filter
- Increased HEPA filter lifetime
- Reduced service cost

# ATTIX 33 & 44 standard models

InfiniClean™



## TECHNICAL SPECIFICATIONS

Description	ATTIX 33-01 IC	ATTIX 33-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE
Item no.	107412101	107412103	107412104	107412106	107412107
Air Flow Rate (l/min)	4500	4500	4500	4500	4500
Vacuum (mbar/kPa)	250/25	250/25	250/25	250/25	250/25
Power pmax (W)	1400	1400	1400	1400	1400
Power piec (W)	1200	1200	1200	1200	1200
Working sound level (dB(A))	60	60	60	60	60
Container volume (l-max)	30	30	30	42	42
Mains connection (V~/Hz/A)	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16
Length x width x height (mm)	565x385x520	565x385x520	565x385x520	565x385x605	565x385x650
Weight (kg)	14.5	14.5	16	16	17.5
El cable (m)	7.5	7.5	7.5	7.5	7.5
Main filter type	PTFE	PTFE	PTFE	PTFE	PTFE
Filter cleaning system	InfiniClean	InfiniClean	InfiniClean	InfiniClean	InfiniClean
Dust Class		L	L	L	L
<b>Features:</b>					
Extra socket for tool		•	•	•	•
Auto On/Off for power tools		•	•	•	•
SoftStart	•	•	•	•	•
Motor speed control		•	•	•	•
AntiStatic System	AS-ready	AS-ready	•	AS-ready	•
Accessory storage	•	•	•	•	•
Hose and cable storage	•	•	•	•	•
Tool box storage system			•		•
Fleece filter bag 1 pcs			•		•
Disposal bag 1 pcs	•	•	•	•	•
<b>Standard equipment:</b>					
Suction hose with hand tube, Ø32x3.5 m	107409976	107409976		107409976	
Suction hose (red) AS, Ø32x4 m			107413543		107413543
Flat filter PTFE, 0,5 m²	107413540	107413540	107413540	107413540	107413540
Extension tube, st/cr, Ø36 2x505 mm	302000529				
Extension tube, stainless steel. Ø36 2x505 mm		107408074		107408074	
Extension tube, stainless steel, Ø36 3x350 mm			107416995		107416995
Curved hand tube, stainless steel			46691		46691
Floor nozzle Ø36x300 mm	302002331	302002331	302002331		
Industrial floor nozzle Ø36x400 mm				302003666	302003666
Universal nozzle, 115 mm			14295		14295
Suction brush			302002509		302002509
Crevice nozzle, 200 mm	29541	29541	29541	29541	29541
Tool adapter with suction regulation		107409977		107409977	
Tool adapter AS			302000535		302000535

# ATTIX 33 & 44 safety models

InfiniClean™

Push&Clean™



## TECHNICAL SPECIFICATIONS

Description	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 44-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	ATTIX 44-2H IC
Item no.	107412179	107412180	107412182	107412183	107412184	107412186
Air Flow Rate (l/min)	4500	4500	4500	4500	4500	4500
Vacuum (mbar/kPa)	250/25	250/25	250/25	250/25	250/25	250/25
Power pmax (W)	1400	1400	1400	1400	1400	1400
Power piec (W)	1200	1200	1200	1190	1190	1190
Working sound level (dB(A))	60	60	60	60	60	60
Container volume (l-max)	30	30	42	30	30	42
Mains connection (V~/Hz/A)	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16	220-240/1/50-60/16
Length x width x height (mm)	565x385x520	565x385x520	565x385x605	565x385x520	565x385x520	565x385x605
Weight (kg)	14.5	14.5	16	14.5	14.5	16
El cable (m)	7.5	7.5	7.5	7.5	7.5	7.5
Main filter type	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
Filter cleaning system	Push&Clean	InfiniClean	InfiniClean	Push&Clean	InfiniClean	InfiniClean
Dust Class	M	M	M	H + Asbestos	H + Asbestos	H + Asbestos
<b>Features:</b>						
Extra socket for tool	•	•	•	•	•	•
Auto On/off for power tools	•	•	•	•	•	•
SoftStart	•	•	•	•	•	•
Dual filter system				•	•	•
Motor speed control	•	•	•	•	•	•
AntiStatic System	•	•	•	•	•	•
Accessory storage	•	•	•	•	•	•
Hose and cable storage	•	•	•	•	•	•
Fleece filter bag 1 pcs	•	•	•			
Disposal bag 1 pcs		•	•			
Safety filter bag 1 pcs				•	•	•
<b>Standard equipment:</b>						
Suction hose (red) AS, Ø32x4 m	107413543	107413543	107413543			
Suction hose (red) AS, Ø36x4 m				107413544	107413544	107413544
Flat filter PTFE, 0,5 m²	107413540	107413540	107413540	107413540	107413540	107413540
Filter cartridge H-class/HEPA				107413555	107413555	107413555
Extension tube, stainless steel. Ø36 2x505 mm	107408074	107408074	107408074	107408074	107408074	107408074
Curved hand tube, stainless steel	46691	46691	46691	46691	46691	46691
Floor nozzle Ø36 300 mm	302002331			302002331	302002331	
Floor nozzle Ø36 360 mm wet/dry		60356	60356			
Industrial floor nozzle Ø36 400 mm						302003666
Crevice nozzle, 200 mm	29541	29541	29541	29541	29541	29541
Tool adapter AS	302000535	302000535	302000535	302000535	302000535	302000535

These dust extractors meet all wished requirements of craftsmen and other professionals working with fine dust in the building and construction industry





# John Roederer

## Advance CSSR

CONTACT FOR MORE INFO



319-213-5660



[jroederer@hupptoyotalift.com](mailto:jroederer@hupptoyotalift.com)



<https://hupptoyotalift.com>



CEDAR RAPIDS DAVENPORT ANKENY WATERLOO PEORIA, IL.