



CHARIOT



**RATED
CAPACITY**

**UP TO
400 LBS**

**12 VOLT
ELECTRIC
POWER
SYSTEM**

**MAX SPEED
FORWARD
UP TO**

**9
MPH**

Shown With Options

Columbia's Chariot is designed to move key personnel around your facility quickly, quietly and efficiently. With PURE ELECTRIC power and an overall width that will fit through most standard doorways, your Chariot will take you everywhere you need to go!

The Chariot moves 3X faster than normal walking speed, allowing you to cover more ground in less time!

Plus, with low center of gravity and increased visibility of stand-up operation, the Chariot is the safest way to move around an indoor or outdoor space.



- 1** Strobe Light
- 2** Custom Branding
- 3** Side Bumpers




COLUMBIA

BUILT FOR WORK



Dimensions

| | |
|-------------------|----------|
| Step Height: | 5.25 in. |
| Load Bed Height: | 24 in. |
| Ground Clearance: | 2.5 in. |

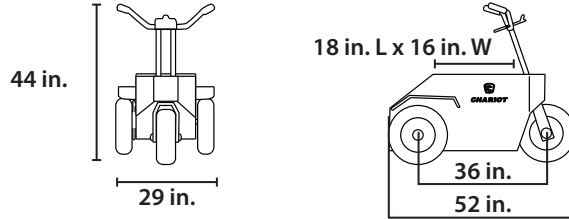

Performance

12 Volt

| | |
|----------------------|---|
| Max Speed Forward: | 9 MPH |
| Turning Radius: | Curb to curb - 79 in. Intersecting aisle - 41 in. |
| Range ¹ : | Up to 35 miles |

Weight & Capacity

| | |
|-------------------------------|----------|
| Vehicle Weight : | 366 lbs. |
| Rated Capacity ² : | 400 lbs. |
| Towing Capacity: | N/A |

Power Train

| | |
|--------------------------|---|
| Motor: | 12-Volt DC, series wound, solid copper windings, class H insulation |
| Horsepower: | 0.7 HP @ 750 rpm |
| Batteries: | Two, 6-volt, 232 amp hour, 122 minute, deep cycle |
| Charger: | Built-in, micro-processor controlled, fully sealed, 120 VAC |
| Controller Type: | 3 speed, slide-bar switch |
| Controller Rating: | N/A |
| Motor Braking Mode: | N/A |
| Directional Control: | Optional reverse |
| Drive Unit/Differential: | Heavy-duty chain to drive wheel, 7.4:1 final drive ratio |

Body

| | |
|---------------------|---|
| Passenger Capacity: | One |
| Seating: | Stand up operation |
| Body: | 14-gauge powder coated structural steel smooth plate body |
| Lighting: | Optional head, tail & brake light |
| Accessories: | Shin guard; handlebar steering; composite deck board with high-density polyethylene overlay, special strobe light |

Chassis

| | |
|-------------|--|
| Frame: | Heavy duty welded steel chassis |
| Steering: | Handle bar to front fork |
| Brakes: | 4.5" Mechanical drum on drive wheel, automatically engaged upon dismount |
| Suspension: | N/A |
| Tires: | 4.80" x 8", pneumatic, 6-ply rated, load range C |

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.
¹ Range will vary depending on temperature, grade, payload and driving style. | ² Rated Capacity Includes personnel, cargo, options and accessories.

All specifications are subject to change without notice.

Columbia Vehicle Group, Inc.

A Nordic Group Company | Business Ventures Since 1947
 1115 Commercial Ave. Reedsburg, WI 53959
 columbiavehicles.com



COLUMBIA



TOMBERLIN



Call your local
Hupp Toyotalift
branch for a
quote
today!



CEDAR RAPIDS
319.362.0098



DAVENPORT
563.322.3168



ANKENY
515.965.5555



WATERLOO
319.433.0029



PEORIA, IL.
309.674.4877

