



# EXPEDITER



Shown With Options

MOVE  
up to  
**2**  
PASSENGERS

RATED  
CAPACITY  
UP TO  
750 LBS

TOW  
UP TO  
1,000 LBS

MAX SPEED  
FORWARD  
UP TO  
**9**  
MPH

Columbia's Expediter will be your top performing productivity partner – getting you where you need to be quickly and safely. Its narrow design, tight turning radius and best-in-class capacity rating enable you to transport personnel and payload through “tight spots” and right up to a job site! The standard fold down seat back converts the Expediter into a two-person transport, making it a versatile solution capable of pulling double duty at your facility. Available options allow Columbia to match just the right Expediter to your specific needs!

Productivity ideas of your own? Let us know! We'll will draw on our 60-plus years of experience to help customize your very own Expediter!



1



2



3

- 1 Front Bumper
- 2 Steering Wheel
- 3 Tool Express Package



**COLUMBIA**


# BUILT FOR WORK



# EXPEDITER

## Dimensions

Step Height:	7.75 in.
Load Bed Height:	24 in.
Ground Clearance:	4 in.

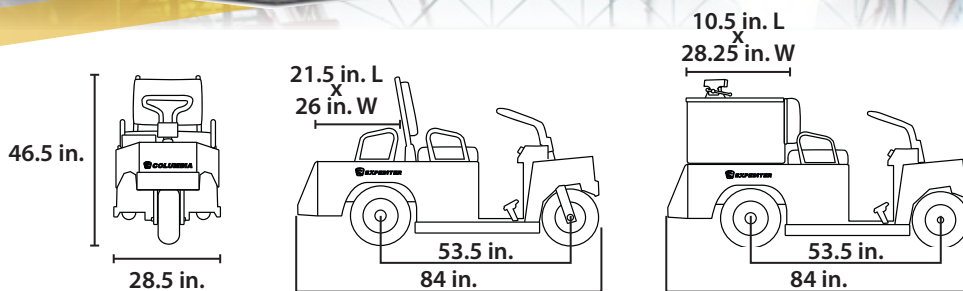

## Performance

### 24 Volt

Max Speed Forward:	9 MPH
Turning Radius:	Curb to curb; 3-wheel - 127 in. 4-wheel - 175 in.   Intersecting aisle; 3-wheel - 66 in. 4-wheel - 83 in
Range <sup>1</sup> :	25 miles

## Weight & Capacity

Vehicle Weight :	3-wheel - 855 lbs. 4-wheel - 940 lbs.
Rated Capacity <sup>2</sup> :	750 lbs.
Towing Capacity:	Up to 1,000 lbs.

## Power Train

Motor:	24-Volt, NEMA class H temperature rated, separately excited
Horsepower:	5.2 HP @ 875 RPM
Batteries:	Four, 6-Volt, 232 amp hour, 122 minute, deep cycle
Charger:	Built-in, micro-processor controlled, fully sealed, global, 110 - 240 VAC, 50/60 HZ
Controller Type:	Programmable, solid state, reduced speed reverse with diagnostic LED & calibrator interface
Controller Rating:	300 amp
Motor Braking Mode:	Regenerative and accelerator pedal proportional
Directional Control:	Fully electronic direction switching with console mounted selector switch
Drive Unit/Differential:	Automotive style, helical gears in oil bath, direct to motor

## Body

Passenger Capacity:	One or two
Seating:	Black vinyl with fold-down back rest
Body:	14-gauge powder coated structural steel smooth plate body
Lighting:	Optional - head, tail & brake light
Accessories:	Horn; battery discharge indicator; reverse warning alarm; driver seat power interlock switch; composite deck board with high-density polyethylene overlay

## Chassis

Frame:	Heavy duty welded steel chassis with 14-gauge structural steel smooth plate body
Steering:	Loop tiller control bar / Steering wheel option / T-bar control option
Brakes:	Auto adjusting, mechanical rear drum/foot parking brake
Suspension:	Rear - Coil springs with shock absorbers
Tires:	4.80" x 8" 4-ply rating, load range B

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.  
<sup>1</sup> Range will vary depending on temperature, grade, payload and driving style. | <sup>2</sup> Rated Capacity Includes personnel, cargo, options and accessories.

All specifications are subject to change without notice.

*Columbia Vehicle Group, Inc.*

A Nordic Group Company | Business Ventures Since 1947  
 1115 Commercial Ave. Reedsburg, WI 53959  
 columbiavehicles.com



**COLUMBIA**



**TOMBERLIN**





Call your local  
Hupp Toyotalift  
branch for a  
quote  
today!



---

**CEDAR RAPIDS**  
**319.362.0098**



**DAVENPORT**  
**563.322.3168**



**ANKENY**  
**515.965.5555**



**WATERLOO**  
**319.433.0029**



**PEORIA, IL.**  
**309.674.4877**

